

Super Flexible, Super Fast, Super Value

Gigabit PTMP Client with Modular Antennas

Building on the popular X-series family of modular directional antenna options for flexible distance deployments, the new rugged C6x sets a new bar for affordable speed and interference reduction. With the latest in Wi-Fi 6E OFDMA technologies, and access to new 6 GHz bands¹, the C6x achieves extremely low latency speeds of up to 1.75 Gbps and high reliability with new noise fighting features. Supporting the Wi-Fi 5/6/6E standards, the C6x can be deployed as a standard Wi-Fi interoperable client, and provide smooth transitioning in the field for legacy Mimoso and standard Wi-Fi deployments.

Integrated Radio with Modular Antenna Options

The C6x radio's native 8 dBi gain can be increased to 12, 16, 20 or 25 dBi using modular, X-series, twist-on antennas, offering the ease and simplicity of integrated radios, but with so much more flexibility.

Noise Just Met Its Match


The link reliability of the C6x starts with the high isolation design of the X-series antennas—but there's so much more that's new. Based on Wi-Fi 6E OFDMA technologies, the C6x reduces in-band noise impact across the operating channel with dramatically smaller 2 MHz resource units (RU) sizes instead of legacy OFDM solutions, where any noise impacted the full channel.

Incredible Speed and PTMP Scale

Previous OFDM technologies limited the scale of client deployments and the ability to deploy in dense, noisy areas. In PTMP client deployments, the C6x pairs together with new multi-user OFDMA scheduling and beamforming technologies on the A6 access point to enable massive subscriber scaling, advanced noise management, and access to the new low-noise 6 GHz band¹.

Carrier Grade

While the C6x rugged IP67 design is built to withstand the elements, carrier-grade management capabilities with Airspan ACP and MMP enable operators to deploy and monitor with ease. Together with next-gen RF noise fighting features and new low-noise 6 GHz band support, C6x leads the way in dependable connectivity.

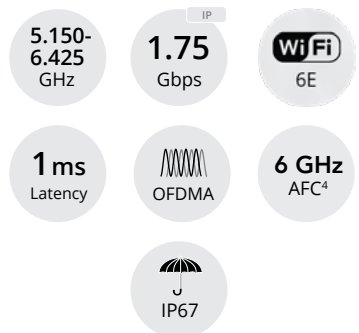

Need more information?
Contact the Mimoso sales team by visiting mimosa.co/contact-us.

Specifications

Performance

- **Max Throughput:**
1.75 Gbps IP aggregate UL/DL (2402 Mbps PHY)
- **Wireless Protocols:**
WiFi Interop; Auto-TDD (future release);
PTMP TDMA (future release)
- **Modes:**
Default mode:
PTMP client, 1.75 Gbps

Radio

- **MIMO & Modulation:**
2x2, PTMP MU-MIMO client support, OFDMA,
BPSK-1024QAM
- **Bandwidth:**
20/40/80/160 MHz channels, tunable to 5 MHz increments
- **Frequency Range:** PTMP: 5150–6425 MHz^{1,2}
(restricted by country of operation)
- **Max Output Power:** 24 dBm
- **Sensitivity (MCS 0):**
-87 dBm @ 80 MHz
-90 dBm @ 40 MHz
-93 dBm @ 20 MHz

Power

- **Max Power Consumption:** 20 W
- **System Power Method:**
Passive PoE
- **PoE Power Supply:**
Passive POE compliant, 48–56 V
(PoE injector not included)

Physical

- **Dimensions:**
Height: 178mm (5")
Width: 113mm (4.5")
Depth: 67mm (2.6")
- **Weight:** 0.7 kg (1.54 lbs)
- **RF Connector Type:** X-series twist-on
- **Enclosure Characteristics:**
Die-cast aluminum, UV stabilized paint, with outdoor UV
stable plastic radome lens
- **Mounting:**
Dual attached pole mount straps
- **Grounding:** Ground lug

Environmental

- **Outdoor Ingress Protection Rating:** IP67
- **Operating Temperature:** -40°C to +55°C (-40°F to 131°F)
- **Operating Humidity:** 5 to 100% condensing
- **Operating Altitude:** 4,420 m (14,500') maximum
- **Shock and Vibration:** ETS 300-019-2-4 class 4M5

Regulatory and Compliance

- **Approvals:**
FCC Part 15.407; IC RSS210; CE (RED, EMCD, LVD, RoHS);
ETSI 301 893/302 502
- **RoHS Compliance:** Yes
- **Safety:** EN 62638-1

Features






- **Gigabit Ethernet:** 10/100/1000-BASE-T
- **Management Services:**
MMP support; Netconf (future support); SNMPv2c/v3; Syslog;
HTTPS; HTML 5 based Web GUI; IPv4 and IPv6
- **Smart Spectrum Management:**
Active scan monitors/logs ongoing RF interference across all
channels (no service impact); Dynamic auto-optimization of
channel and bandwidth use
- **Security:** AES; RADIUS; 802.1x authorization
- **QoS:** WiFi Interop Mode WMM;
SRS mode supports 4 user configurable QoS levels
supporting both CBWFQ and PQ
- **VLAN:** Q-in-Q, double tagging, management VLAN, PTMP
per client VLAN



¹ Outdoor 6 GHz availability varies by country regulations. USA/FCC may only allow PTMP client mode.

² Automatic Frequency Coordination database support via firmware update, once formally approved by the FCC



N5-X Modular Antenna Options

					
Product	C6x (no antenna)	N5-X12 (horn)	N5-X16 (horn)	N5-X20 (dish)	N5-X25 (dish)
Gain	8 dBi	12 dBi	16 dBi	20 dBi	25 dBi
Polarization	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°
Beamwidth, Symmetric (3 dB)	58°	38°	22°	12°	8°
Front-to-Back Ratio (min)	21 dB	29 dB	50 dB	35 dB	40 dB
Front-to-Side Ratio (min)	21 dB	27 dB	43 dB	37 dB	> 45 dB
Weight	0.7 kg (1.54 lbs)	0.16 kg (0.35 lbs)	0.61 kg (1.35 lbs)	0.77 kg (1.70 lbs)	0.98 kg (2.15 lbs)
Dimensions	Height: 178 mm (5") Width: 113 mm (4.5") Depth: 67 mm (2.6")	Diameter: 76 mm (2.99") Depth: 67 mm (2.63")	Diameter: 160 mm (6.29") Depth: 116 mm (4.57")	Diameter: 270 mm (10.63") Depth: 83 mm (3.27")	Diameter: 429 mm (16.89") Depth: 116 mm (4.57")
Mount	Dual-pole clamps	Mimosa N5-X twist-on	Mimosa N5-X twist-on	Mimosa N5-X twist-on	Mimosa N5-X twist-on
Wind Survivability	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)
Wind Loading	2.79 kg @ 160 km/h (6.14 lbs @ 100 mph)	3.27 kg @ 160 km/h (7.20 lbs @ 100 mph)	5.13 kg @ 160 km/h (11.30 lbs @ 100 mph)	14.55 @ 160 km/h (32.07 lbs @ 100 mph)	36.26 kg @ 160 km/h (79.95 lbs @ 100 mph)



Polar Plots and Gain Across Frequencies





Native, Built-In (8 dBi)

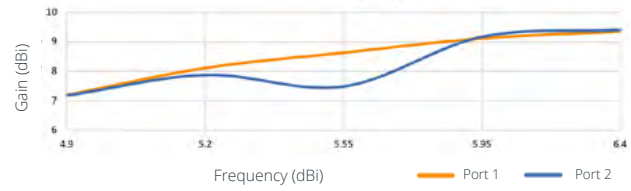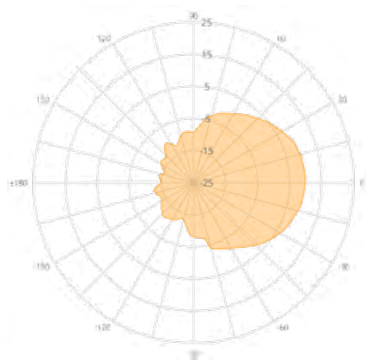



N5-X12 (12 dBi)

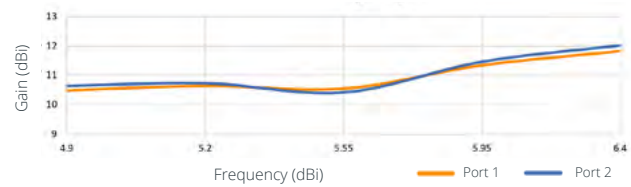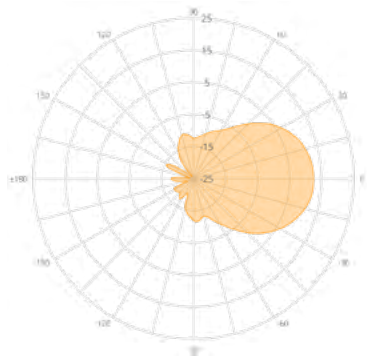



N5-X16 (16 dBi)

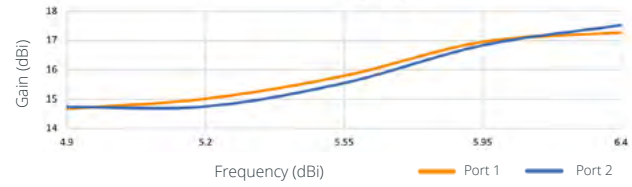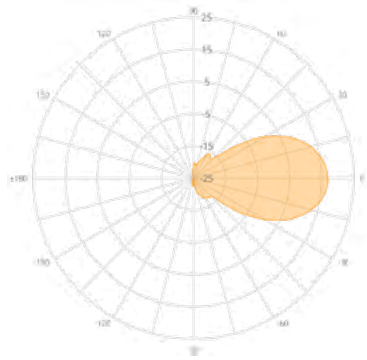

N5-X20 (20 dBi)

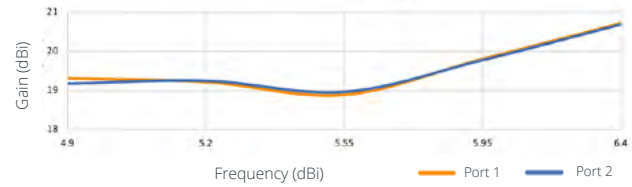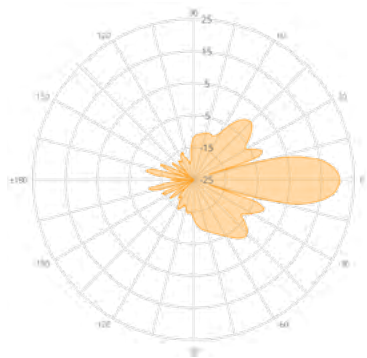

N5-X25 (25 dBi)

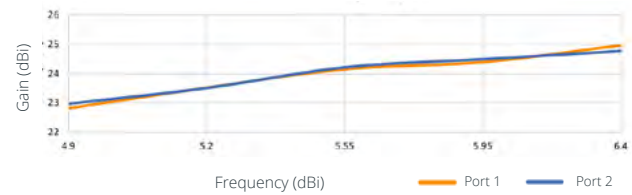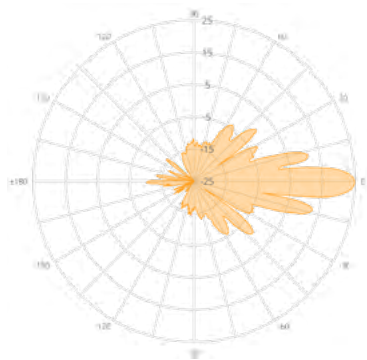

Mimosa, a product division of Airspan, is the global technology leader in wireless broadband solutions, enabling service providers to connect dense urban and hard-to-reach rural homes at a fraction of the cost of fiber. Mimosa was acquired in 2018 by Airspan Networks Holdings Inc. (NYSE American: MIMO), the award-winning, leading vendor of 5G software and hardware.